



12.20m (40ft) Working height

6.10m (20ft) Working outreach

Telescopic Upper Boom Greater accuracy when positioning platform

**1.50m Chassis Available** Improved narrow aisle access

Weight Under 3.1 Tonnes Low cost transportation

> Fully Proportional Hydraulic Controls Simple, reliable & easy to maintain

**Bi-Energy Available** Optimising Utilisation



011




The Nifty **Height Rider 12** is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it ideal for a wide range of applications.

2.22m

4.20m

## SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

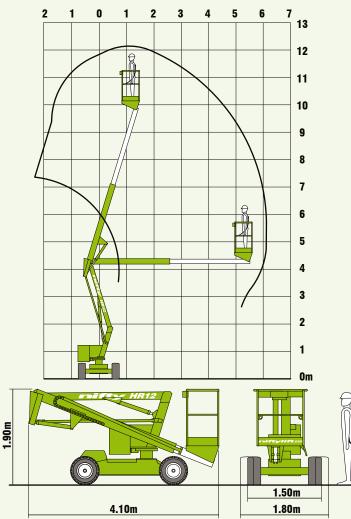

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

<image>

**SPECIFICATIONS** 

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft
Slew	360°	
Width - Standard	1.80m	5ft 11in
- Narrow	1.50m	4ft 11in
Height	1.90m	6ft 3in
Length	4.10m	13ft 5in
Minimum Weight - Standard	2,630kg*	5,800lbs*
- Narrow	3,060kg*	6,750lbs*
Turning Radius - Inside 🥢	2.22m	7ft 3in
- Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4 kph
Gradeability	25%	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only	
	Petrol, Diesel or LPG Only	
	Bi-Energy (Engine & Battery)	
* Weights may vary according to specification, plea	se confirm before ordering	

\* Weights may vary according to specification, please confirm before ordering.

## Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD Fingle Drive Stonebridge Milton Keynes MK13 OER England www.niftylift.com e.mail: info@niftylift.com Tel.: +44 (0)1908 223456 Fax.: +44 (0)1908 312733

Supplied by: